



FOR NEW EQUIPMENT SALES, CALL  
**800.958.2555**  
 TO SPEAK WITH AN ALTEC REPRESENTATIVE  
 or visit us online at [altec.com](http://altec.com)

**Altec**  
 TELESCOPIC ARTICULATING  
 AERIAL DEVICE



## FEATURES

- Non-Insulating Aerial Device
- All Steel Telescopic Articulating Boom Construction
- Hydraulically Extended Inner Boom
- Engine Start/Stop at Upper and Lower Controls
- Open-Center Hydraulic System
- 120 VAC Circuit at Boom Tip with GFI Outlet
- Minimum Chassis Requirement of 15,000 lb (6,804 kg) GVWR  
60 in (1,524 mm) CA or 84 in (2,134 mm) CA

## OPTIONS


- Pedestal or Bridge Mount
- Choice of Platform:
  - » Side or End-Mount
  - » Walk-In Round or Rectangular Splicer
- Hydraulic Leveling
- Variable Speed Single Handle Upper Control
- Proportional Electric/Hydraulic Single-Handle Upper Control
- Inverter for 110V Power
- Choice of Hydraulic Reservoir:
  - » Bed-Mount
  - » Pedestal-Mount
- Airline to Platform
- Canopy and Curtain Assembly
- Secondary Stowage System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays
- Fiberglass and Steel Body Configurations are Available

Recommended safety equipment, available through Altec Supply, include fall protection system and wheel chocks.

SPECIFICATIONS	Ground to Bottom of Platform	
	End-Mount (at Platform Height)	35.3 ft (10.7 m) 8.0 ft (2.4 m)
	Side-Mount (at Platform Height)	35.0 ft (10.7 m) 6.5 ft (2.0 m)
	Working Height	
	End-Mount	40.3 ft (12.3 m)
	Side-Mount	40.3 ft (12.3 m)
	Maximum Reach from Centerline of Rotation	
	End-Mount	26.5 ft (8.1 m)
	Side-Mount	24.9 ft (7.6 m)
	Platform Capacity	
	End-Mount	350 lb (159 kg)
	Side-Mount	350 lb (159 kg)
Articulating Arm Articulation		-0 to 79°
Boom Articulation		-25 to 78°
Stowed Travel Height		10.9 ft (3.3 m)
Rotation		Non-Continuous, 370°



## REACH DIAGRAM

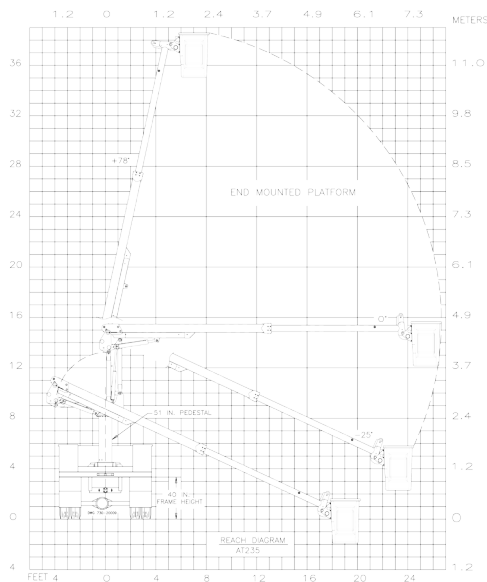

## EASY GROUND TO PLATFORM ACCESS



## EXCEPTIONAL VERTICAL REACH



For more complete information on Altec products and services, visit us on the web at [www.altec.com](http://www.altec.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission.

© 2016 Altec Inc. All Rights Reserved. AIOSAT235-00116-v1