



HOLDER

HOLDER C 70 SC





MULTIFUNCTIONAL SOLUTIONS:

WINTER MAINTENANCE

- Snow plowing, blowing, sweeping, loading
- Cross-country ski-tracks
- Spreaders
- Brine spraying
- Ice scraping

MOWING AND GROUND CARE

- Mowing-vacuum combination
- Verge mowing
- Mowing (with flail head, rotary, wide area, and boom arm mower)
- Mulching
- Hedge cutting
- Watering

SWEEPING AND CLEANING

- Sweeper-vacuum combination
- Sweeping brush
- Cleaning of reflective posts and traffic signs
- Leaf removal
- Pressure washer
- Synthetic turf cleaner
- Hot water weed control

TECHNICAL DATA

	C 70	
ENGINE	Kubota 4-cylinder 4-stroke turbo diesel	
Emission Standard	Tier 4 Final	
Displacement	159 in³	
Power	65 HP	
Torque	165 lbf·ft	
Rated speed	2400 rpm	
Cooling	Water cooling	
Fuel tank capacity	17 gal	
DRIVE	Hydrostatic traction drive, digitally controlled, stepless road speed control, suspended front and rear axle	
	PowerDrive via four (4) wheels of the same size	
Differential lock	Mechanical at the front and rear, simultaneously switchable electrohydraulically, acts on both axles at 100%	
Maximum speed	25 mph	
PTO shafts	Optional: power-switchable, independent PTO shaft, can be switched separately at the front and rear Front: mechanically powered, 1000 rpm or optionally 540 rpm Rear: hydraulically powered, 540 rpm Size: 1 3/8 in	
Brakes	Hydraulically actuated four-wheel brake, electrically actuated stop brake on the front axle	
HYDRAULICS	Hydraulic pump 12 US gpm Option: extendable with additional device variable displacement pump 19 US gpm	
Hydraulic oil quantity	9.7 gal	
Lifting force	Front 2425 lb Rear 2425 lb	
Additional control valves	High expandability, adapted for the purpose	
WEIGHT	Including driver at 165 lb, depending on tires and equipment	
Tare weight	4250–5190 lb	
Permissible gross weight	7715–8377 lb	7715–8820 lb
Permissible axle load	Front 5070 lb Rear 5070 lb	
Tow-bar load on the trailer coupling	Max. 1320 lb	
Towing capacity	Unbraked 3310 lb Overrun braked 7715 lb	
Maximum payload	4127 lb	
DIMENSIONS	Depending on tires and cab mounting	
Wheelbase	72 in	
Total length	115–148 in	
Total height with cab	79–89 in	81–89 in
Total outside width	46–60 in	
Turning radius inside	From 59 in	

HOLDER IN ACTION: www.youtube.com/user/holdertractorsinc

HOLDER
NO COMPROMISE

Holder Tractors Corporation
Phone: 844. 332. 3200
sales@holdertractors.com
www.holdertractors.com




THE
STRONGEST
IN ITS
CLASS!

HOLDER

NEW HOLDER S-SERIES

HOLDER S 100 | HOLDER S 130



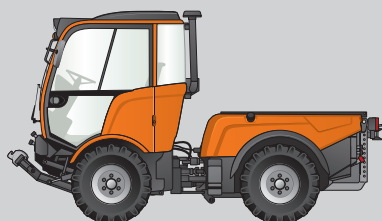

MULTIFUNCTIONAL SOLUTIONS:

WINTER MAINTENANCE

- Snow plow, blowing, sweeping, loading
- Cross-country ski-tracks
- Spreaders
- Brine spraying
- Ice scraping

MOWING AND GROUND CARE

- Mower-vacuum combination
- Ditch clearing
- Mowing (with flail head, rotary, wide area, and boom arm mower)
- Mulching
- Hedge cutting
- Watering

SWEEPING AND CLEANING

- Sweeper-vacuum combination
- Sweeping brush
- Cleaning of reflective posts and traffic signs
- Debris removal
- Leaf removal
- Pressure washer
- Synthetic turf cleaner
- Hot water weed control

TECHNICAL DATA

	S 100	S 130
ENGINE	Deutz TCD 3.6 4-cylinder common turbo diesel	
Emission standard	Tier 4 Final	
Displacement	221 in ³	
Power	101 HP	129 HP
Maximum torque	302 lbf · ft at 1600 rpm	
Cooling	Water cooling	
Fuel tank capacity	18 gal	
DRIVE	Stepless DUAL DRIVE drive system (combination of hydrostatic and mechanical drive) with permanent all-wheel drive and electronic load limit control	
Differential lock	Front and rear, mechanical with 100% locking	
Speed	25 mph	
PTO shafts	Front Option 1: 540/750 rpm Option 2: 1000/750 rpm	
Brakes	Hydraulically actuated wet disc brake, acts on all four wheels as four-wheel brake, electric stop brake acts on both axles	
HYDRAULICS	Hydraulic pump 6.6 US gpm or on request tandem pump with adjustable flow divider 10.5 US gpm + 6.6 US gpm variable displacement pump 31.7 US gpm	
Hydraulic oil quantity	7.4 gal	
Lifting capacity	5952 lb	
Rear power lift	CAT II, double-acting	
WEIGHT	Including driver at 165 lb, depending on tire size and equipment	
Tare weight	6834 – 7605 lb	
Permissible gross weight	12125 lb Option: 13277 lb	
Permissible axle load	Front 7054 lb Rear 7054 lb	
Tow-bar load on the trailer coupling	Maximum 1763 lb	
Towing capacity	Unbraked 5511 lb Overrun braked 9920 lb	
Maximum payload	5291 lb Option: 6393 lb	
DIMENSIONS	Depending on tire size	
Wheelbase	71 in	
Total length	154 in	
Total height with cab	87 – 90 in	
Total outside width	53 – 62 in	
Turning radius inside / outside	77 in / 119 in	

HOLDER IN ACTION: www.youtube.com/user/holdertractorsinc



YOUR TOP ADVANTAGES

- Three independent hydraulic drives
- Two proportional functions simultaneously operatable
- Programmable joystick
- LED lighting
- 100% mechanical differential lock on both axles
- Three mounting areas for multi functional solutions
- Mechanical front PTO
- Hydraulic wheel stabilizer
- Outstanding maneuverability
- Three cab configurations
- Touch display


HOLDER
NO COMPROMISE

Holder Tractors Corporation
Phone: 844. 332. 3200
sales@holdertractors.com
www.holdertractors.com



HOLDER

HOLDER X 45i

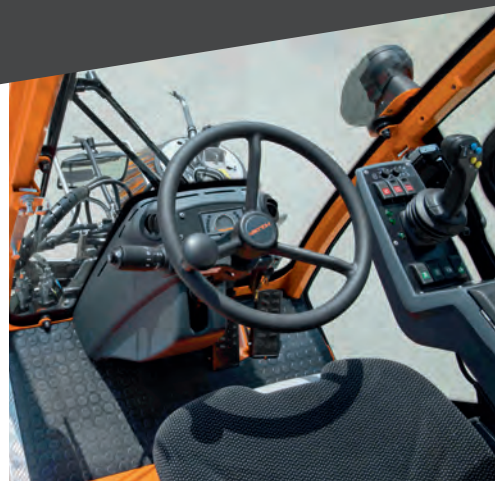



TECHNICAL DATA

MULTIFUNCTIONAL SOLUTIONS:

- X³ hopper for sweeping, mowing, watering and washing
- Platform
- Setting-down device
- 2-brush system with individual brush control
- Front sweeping brush
- Front rotary mower with optional mulching kit
- Front washing bar
- Side-clearing plow
- Folding V-plow
- Drop spreader
- Disc spreader

YOU ARE IN GOOD HANDS

- 24 month warranty
- Reliable spare parts supply
- Close service network and local partners
- Long operational life span
- High stability of value
- Rental, financing and leasing

COMFORTABLE CABIN

- Rear view cam
- Suction mouth cam
- Hands-free-device for mobile phone
- Panoramic cab
- 3-point safety belt

	X 45i
ENGINE	Kubota 4-cylinder gasoline
Displacement	98 in ³
Power	44 HP
Rated speed	2600 rpm
Cooling	Water cooling
Fuel tank capacity	9.2 gal
DRIVE	Hydrostatic traction drive, stepless road speed control, four (4) wheels of the same size
Maximum speed	16 mph
Brakes	Hydrostatic brake on the front axle, acts on all four (4) wheels, mechanical parking brake on the front axle with two (2) drum brakes
HYDRAULICS	1. circuit 13.4 US gpm at 2600 rpm, 2. circuit 7.6 US gpm at 2600 rpm, 3. circuit 1.3 US gpm at 2600 rpm
Hydraulic oil quantity	3.3 gal
Lifting capacity	Front 1653 lb
WEIGHT	Including driver at 165 lb, depending on tire size and equipment
Tare weight	2821 lb
Permissible gross weight	5070 lb
Permissible axle load	Front 2623 lb Rear 2623 lb
Tow-bar load on the trailer coupling	165 lb
Towing capacity	Braked 1984 lb
Maximum payload	2248 lb
DIMENSIONS	Tires 23 x 10.50-12 in
Wheelbase	53 in
Total length	112 – 114 in
Total height with cab	77 – 79 in
Total outside width	43 in
Turning radius	84 in
SWEeper-SUCTION-UNIT	
Hopper, gross / net	1.5 cu ya / 1 cu ya
Fresh water tank	39.6 gal
Maximum sweeping width	80 in

HOLDER IN ACTION: www.youtube.com/user/holdertractorsinc



YOUR TOP BENEFITS

- Strongest in its class with 42 HP and 44 HP
- Comfortable driver's cabin
- Intuitive and ergonomic working joystick
- Three applications with only one hopper
- Low-noise sweeping
- Made for low underground parking lots
- High ramp angle for passing obstacles and higher curbs

HOLDER
NO COMPROMISE

Holder Tractors Corporation
Phone: 844. 332. 3200
sales@holdertractors.com
www.holdertractors.com