



CAPTURING SEDIMENT ON THE GO, ENABLING CLEAN WATER TO FLOW

VISIT


FLO-WATER.NET

**HI-FLO™ SILT FENCE
CUSTOM-FLO™ SOLUTIONS**

Specification sheets available

EZ-Flo™

PATENT
PENDING

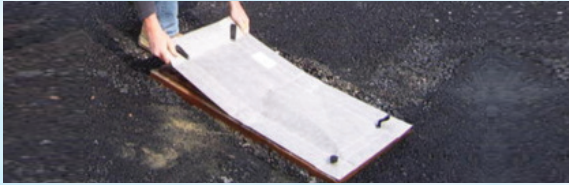


EZ-FloMan™



**EZ-Flo™/EZ-FloMan™
Above Grate Magnet
Inlet Protection
#1 at Silica containment**



EZ-ClipGuard™



Flo-Water Specifications

Properties	ASTM Test	Value
Mass per Unit Area (oz/yd ²)	D 3776	5.13
Grab Tensile Strength, MDxCD (lbs)	D 4832	297/223
Grab Tensile Strength, MDxCD (N)	D 4832	58/59
Trapezoidal Tear, MDxCD (lbs)	D 4833	81x75
Puncture (lbs)	D 4833	99
Burst Strength (psi)	D 3786	340
Permeability (sec-1)	D 4491	2.60
A.O.S.(U.S. sieve - (mm))	D 4751	60
Water Flow Rate (gpm/ft ²)	D 4491	192

- PROPRIETARY MATERIAL ALLOWS 2.5 TIMES
TYPICAL INDUSTRY MATERIAL FLOW RATES
- 15% GREATER FILTERING EFFICIENCY

**515-577-6763
CORYDON@FLO-WATER.NET**