



FOR NEW EQUIPMENT SALES, CALL  
**800.958.2555**  
TO SPEAK WITH AN ALTEC REPRESENTATIVE  
or visit us online at [altec.com](http://altec.com)

 **Altec**  
ARTICULATING TELESCOPIC  
AERIAL DEVICE

## FEATURES

- Altec ISO-Grip® Control System
- Articulating Telescopic Aerial Device
- Compensated Articulating Arm
- Hydraulic Boom Extension
- Insulating, ANSI Category C, 46 kV and Below
- Continuous Rotation
- Platform, 24 x 30 x 42 in (610 x 762 x 1067 mm) Nominal
- Hydraulic Platform Leveling
- Platform Capacity – 350 lb (159 kg) Fixed
- 350 lb (159 kg) with Rotator
- Fully Metered Single Handle Upper Control
- Full Pressure, Open Center Hydraulic System
- Platform Access from the Ground
- Emergency Lowering Valve
- Tool Circuit at Platform
- Back-up Alarm
- Outrigger Boom Interlock System (With Outrigger Option)
- Outrigger Motion Alarm (With Outrigger Option)


SPECIFICATIONS	Ground to Bottom of Platform*	37.8 ft (11.5 m)
	@ Distance From Centerline	11.2 ft (3.4 m)
	Maximum Reach:	
	End-Mount	28.3 ft (8.6 m)
	Side-Mount	26.2 ft (8.0 m)
	@ Platform Height	14.6 ft (4.5 m)
	Stowed Travel Height*	10.2 ft (3.1 m)
	Lower Boom Articulation	-25° to 75°
	Articulating Arm Articulation	-7° to 90°
	Rotation	Continuous
	Weight of Unit	2378 lb (1079 kg)
	* Based on a 40 in (1016 mm) chassis frame height	

## OPTIONS

- Non-Continuous Rotation
- Secondary Stowage System
- Engine Start/Stop
- Tool Circuit at Tailshelf
- Outriggers, Vertical
- 400 lb Platform Capacity
- Platform Cover
- Platform Rotator - 90° or 180°
- Platform, 24 x 24 x 42 (610 x 610 x 1067mm) Nominal

Recommended safety equipment, available through Altec Supply, include a fall protection system and wheel chocks for stationary set-ups.

## REACH DIAGRAM

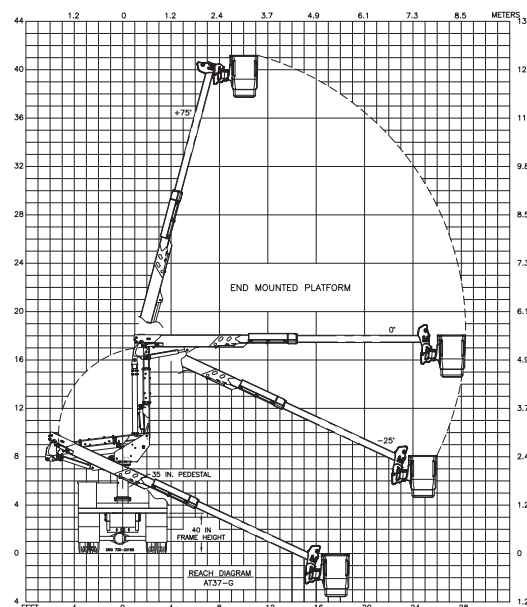

### EASY ACCESS FROM GROUND



### BOOM TIP COVERS



### ACCESS BODY FROM PLATFORM



For more complete information on Altec products and services, visit us on the web at [www.altec.com](http://www.altec.com). Material and specifications are subject to change without notice. Featured units in photos may include optional features. Please contact an Altec representative for all available options. Altec® and the Altec logo are registered trademarks of Altec Inc. in the United States and various other countries and may not be used without permission. © 2018 Altec Inc. All Rights Reserved. AIAT37G-218-v1-r2

